



GASS series Aluminium internal hubs



Features


- Junction for branch conduits in hazardous locations
- Accessible wiring chamber provides a convenient location to maintain or change a system, pull conductors and make splices
- Copper-free aluminium provides increased corrosion resistance
- Extra-wide 3 3/4" opening provides more hand space for easy access to the wiring chamber
- Precision cast and machined surfaces permit safer wire pulling
- Large capacity 31-cu.-in. chamber provides more wiring space

Certification and standards

UL Listed and CSA Certified for hazardous locations:
NEC
Class I Div 1 & 2 CD
Class II Div 1 EFG
Class III Div 1 & 2
Raintight

Technical specifications

Dimensions

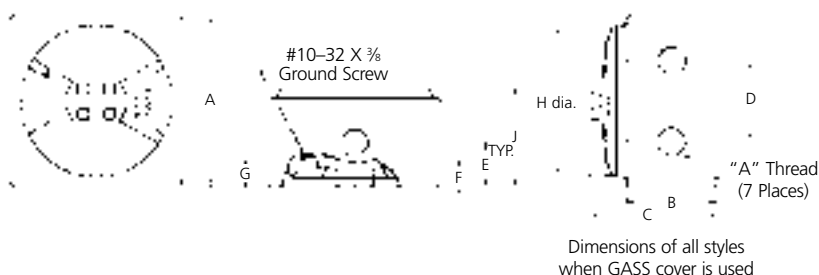

GASS - internal hubs with installed green ground screw, cover and plugs



Type	Hub Size	Unit Quantity	Standard Package	Weight per 100 (lbs)
GASS-1	1 1/2"	1	5	282
GASS-2	3/4"	1	5	278
GASS-3	2"	1	5	274

GASS Cover Opening	Hub Size	A	B	C	D	E	F	G	H	J	CI
4"	1 1/2"	4 5/8	2 3/8	3 3/8	2 3/16	2 3/16	1/2	3/4	4	2 5/8	31
4"	3/4"	4 5/8	2 3/8	3 3/8	2 3/16	2 3/16	1/2	3/4	4	2 5/8	31
4"	1"	4 5/8	2 3/8	3 3/8	2 3/16	2 3/16	1/2	3/4	4	2 5/8	31