




LB and T style Aluminium conduit body



Approvals / Characteristics

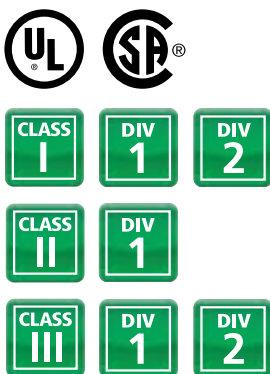

Features

- Junction for branch conduits
- Accessible wiring chamber provides a convenient location to pull conductors and make splices
- 31 cu. in. capacity
- Copper-free* aluminium provides increased corrosion resistance
- Precision cast and machined surfaces permit safer wire pulling
- Precision NPT threaded hubs enable trouble-free field installation for rigid or IMC conduit

Certification and standards

UL Listed and CSA Certified for hazardous locations:

NEC

Class I Div 1 & 2 CD

Class II Div 1 EFG


Class III Div 1 & 2

NEMA 3, 4, 7 CD, 9 EFG

LB and T style - aluminium conduit body

Dimensions

Technical specifications

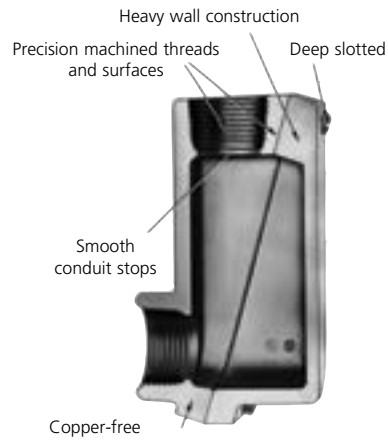

LB style - aluminium conduit body



Type	Hub Size	Unit Quantity	Standard Package	Weight per 100 (lbs)
EXLB-1	1/2"	5	76	92
EXLB-2	3/4"	5	94	115
EXLB-3	1"	5	132	172

T style - aluminium conduit body



Type	Hub Size	Unit Quantity	Standard Package	Weight per 100 (lbs)
EXT-1	1/2"	5	25	92
EXT-2	3/4"	5	25	115
EXT-3	1"	5	5	172

Size range

All sizes are listed in the tables on each page for each cat. no.

Materials

Die-cast aluminium alloy A360 with less than .004% copper content (copper-free)

Finish

Aluminium lacquer finish