




XP Flex™ range

Explosion-proof flexible couplings



Approvals / Characteristics

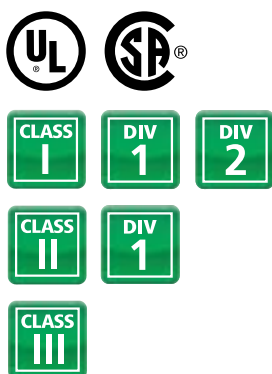

Features

- UL listed for use in hazardous and wet locations
- Corrosion-resistant - ideal for washdown areas
- Flexible bronze construction with arc-resistant inner sleeve and brass fittings
- Terminated with two threaded female end fittings and male close nipples
- No bonding jumper required


Certification and standards

UL listed:

0.5" and 0.75" hub sizes: Class I Div 1 & 2 ABCD;
Class II Div 1 EFG, Class III
1" hub size: Class I Div 1 & 2 CD;
Class II Div 1 EFG, Class III
UL listed 886

Explosion-proof flexible couplings - XP Flex™ range

Dimensions




Technical specifications



| Type | Thread Type (inch) | Flexible Length (mm) | Dimensions (mm) | |
|----------|--------------------|----------------------|-----------------|------|
| | | | A | B |
| XPLFL16 | 1/2" NPT | 150 | 39.1 | 36.6 |
| XPLFL18 | 1/2" NPT | 200 | 39.1 | 36.6 |
| XPLFL110 | 1/2" NPT | 250 | 39.1 | 36.6 |
| XPLFL112 | 1/2" NPT | 300 | 39.1 | 36.6 |
| XPLFL115 | 1/2" NPT | 380 | 39.1 | 36.6 |
| XPLFL118 | 1/2" NPT | 460 | 39.1 | 36.6 |
| XPLFL124 | 1/2" NPT | 610 | 39.1 | 36.6 |
| XPLFL212 | 3/4" NPT | 300 | 40.6 | 47.5 |
| XPLFL215 | 3/4" NPT | 380 | 40.6 | 47.5 |
| XPLFL218 | 3/4" NPT | 460 | 40.6 | 47.5 |
| XPLFL224 | 3/4" NPT | 610 | 40.6 | 47.5 |
| XPLFL236 | 3/4" NPT | 915 | 40.6 | 47.5 |
| XPLFL318 | 1" NPT | 460 | 50.08 | 58.7 |

Explosion-proof and dust-ignition-proof for use in hazardous locations


With their flexible design, T&B® XP Flex™ couplings make it easy to achieve tight bends in conduit systems in confined spaces - or to connect stationary equipment to equipment that moves or vibrates. Their explosion-proof and corrosion-resistant construction mean you can use them with confidence in hazardous and wet locations.

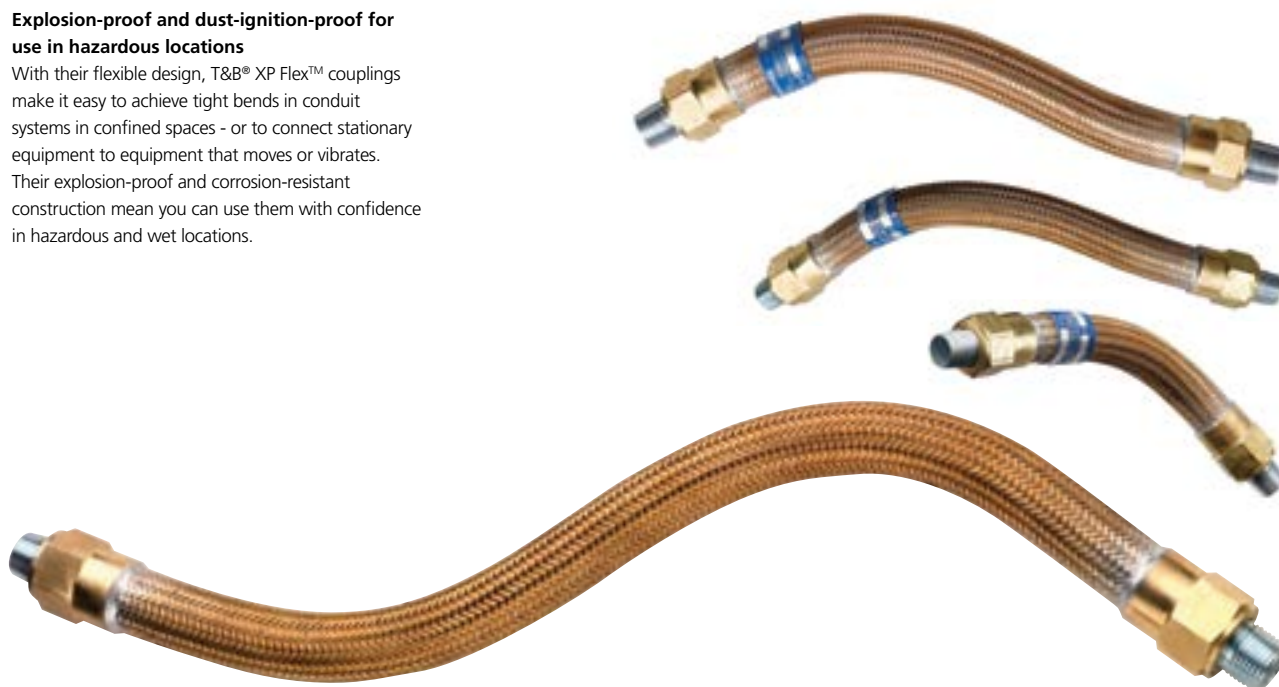

Enlargers, reducers and thread convertors 128



Locknuts 134



Sealing washers 135

Related products