

## PowerView™ Model PV780



### Features


- CAN-Based Display With Rich, Full-Color Graphics
- Compatible With Both Mechanical and Electronic Engines
- Tier 4/Euro Stage IV ready
- Sunlight Readable LCD
- Rugged Design for Extreme Environments
- Multiple Languages
- Easy-to-Use Configuration Software

The PowerView 780 display is a full featured, configurable display that integrated engine, transmission and diagnostic information into an easy to read operator interface. Equipment functionality can be further integrated through the available I/O and controlled via the CANbus.

The PV780 features a full color, 7-inch bonded LCD for brighter, smoother graphics and best in class sunlight readability. The rugged design makes this display a great solution for extreme environments.

The PV780 display is compatible with PowerVision Configuration Studio™ which allows users to edit CAN parameters, add OEM branding and create custom equipment screens for a unique and sophisticated user interface.

### Dimensions

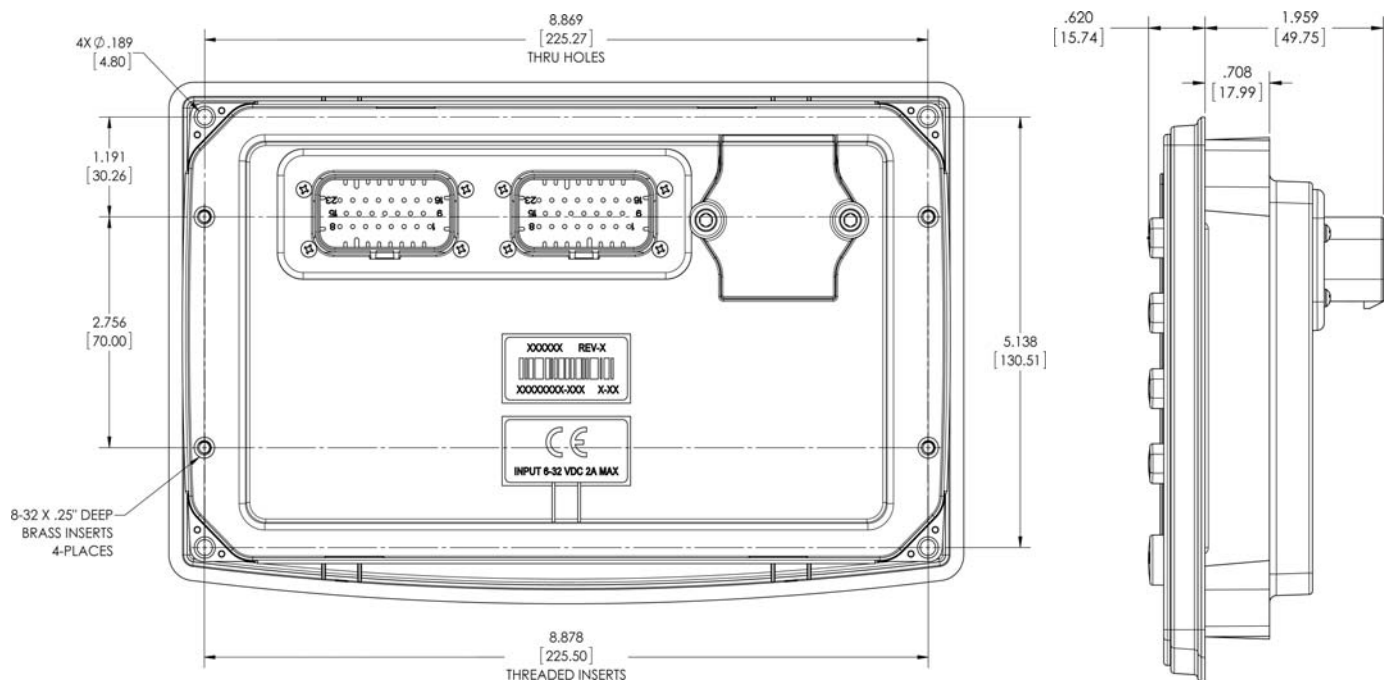

## Specifications

### Technical

**Display:** 7" (178mm) color transmissive TFT LCD

**Resolution:** WVGA, 800 x 480 pixels, 16-bit color

**Aspect Ratio:** 16:9

**Orientation:** Landscape or Portrait

**Backlighting:** LED, 1000 nit maximum brightness

**Microprocessor:** Freescale™ i.MX357, 32 bit, 532 MHz, ARM11 core

**QNX® Real-time Operating System**

**Flash Memory:** 2 GB total, 1 GB available for data logging

**RAM:** 128 Mbytes SRAM

**Operating Voltage:** 6-36 VDC, reverse polarity protected

**Video input:s:** 3 NTSC/PAL

**Connectors:** 2 AMPSEAL 23 Pin (AMP 770680-1 and AMP 770680-4)

**Keyboard:** 10 tactile pushbuttons with white LED backlight

**USB:** (1) USB 2.0 host (OTG, full speed)

**Real time clock:** with Li-ion rechargeable battery backup

**Communications:**

- (2) CAN 2.0B with one isolated (NMEA 2000 compliant); J1939 and CANopen protocols; proprietary messaging
- (1) RS-485 serial (MODBus master/slave)
- (1) USB Host (OTG)

**Outputs:**

- (1) 500mA switched low-side
- (1) Frequency Out (2Hz - 5 kHz) Vbat rms square wave

**Inputs:**

- (3) Analog 0-5VDC, 4-20 mA, or resistive,
- (5) Discreet Digital 0-5V, Active High
- (1) Frequency In (2Hz - 10 kHz), 5Vpk-pk.min, 120Vpk-pk max

### Environmental

**Operating Temperature:** -40°C to +85°C

**Storage Temperature:** -40°C to +85°C

**Protection:** IP66 and 67, front and back.

**EMC/EMI:**

- 2004/108/EC and 2006/95/EC directives
- EN 61000-6-4:2001 (emission)
- EN 61000-6-2:2001 (immunity)
- EN 501121-3-2 and EN 12895
- J1113/2, 4, 11, 12, 21, 24, 26 and 41

**Vibration:** Random vibration, 7.86 Grms (5-2000 Hz), 3 axis

**Shock:** ±50G in 3 axis

### Mechanical

**Dimensions:** 8.37 x 6.0 in. (212.5 x 152.3 mm) landscape

**Unit Depth:** 3.57 in. (90.8 mm)

**Case material:** PC/ABS

**Mounting Options:** Front mount, back mount or gimbal mount

**Certifications:**

- CE
- E-mark capable

## How to Order

How to Order	
Part #	Description
Displays	
78-00-0560	PV780 Display, Murphy Standard
Accessories	
78-05-1181	Cover, PV780
78-00-1053	Bracket kit, PV780 (bracket with screws)
78-00-1055	Harness, Grey Connector, USB
78-00-1056	Harness, Grey Connector, Flying Leads
78-00-1057	Harness, Black Connector, Flying Leads
78-09-0098	Programming Kit, PV780
78-00-1017	Harness, Black Connector, Development
78-00-1018	Harness, Grey Connector, Development
Service	
78-05-1180	Bezel, PV780
78-09-0069	Harness, PV750 Conversion, Power/CAN

## Murphy Instrument Distributor

2005年开始在中国经销Murphy摩菲仪表

信德迈科技（北京）有限公司 CNMEC Technology  
地址：北京市朝阳区望京街10号望京SOHO - T1- C座2115室  
邮编：100102  
电话：010 - 8428 2935, 8428 9077, 8428 3983  
手机：13910962635 qq # 209136943  
邮件：sales@cnmec.biz  
网站：Http://www.cnmec.com