


叉形端头




- 叉形端头易于安装，因为其固定螺钉不用完全取下
- 铜焊接缝压接筒为锯齿形，可获得较高的抗拉拔力。端头为高电导率电解铜、电镀锡。绝缘体有标记色。
- 乙烯基绝缘叉形端头具有超长PVC绝缘套筒，在电缆弯曲点用于保护和应力消除。
- 后缀“X”标明为膨胀式绝缘外壳，意味着更宽的电缆可以进入，适应厚壁绝缘。

尼龙绝缘叉形端头

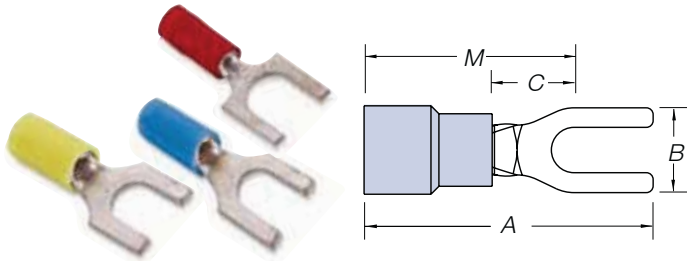

尼龙绝缘锁定叉形端头

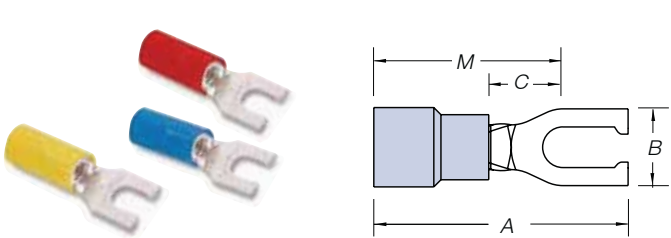


产品编号	包装件数	导线规格范围	最大值 (IN)	螺栓孔	推荐工具	尺寸				材料厚度
						A	B	C	M	
RA18-6F	100	22-16	.136	#6	ERG4001	.83	.25	.25	.71	.02
RA1103	1,000	22-16	.136	#6		.83	.25	.25	.71	
RA18-8F	100	22-16	.136	#8		.86	.31	.25	.71	
RA1123	1,000	22-16	.136	#8		.86	.31	.25	.71	
RA18-10F	100	22-16	.136	#10		.86	.31	.25	.71	
RA1153	1,000	22-16	.136	#10		.86	.31	.25	.71	
RA18-14F	100	22-16	.136	1/4"		.95	.44	.31	.70	
RA1163	1,000	22-16	.136	1/4"		.95	.44	.31	.70	
RB14-6F	100	18-14	.162	#6		.87	.31	.25	.71	.03
RB1113	1,000	18-14	.162	#6		.87	.31	.25	.71	
RB14-8F	100	18-14	.162	#8		.87	.31	.25	.71	
RB1123	1,000	18-14	.162	#8		.87	.31	.25	.71	
RB14-10F	100	18-14	.162	#10		.87	.38	.25	.71	
RB1153	1,000	18-14	.162	#10		.87	.38	.25	.71	
RB14-14F	100	18-14	.162	1/4"		.95	.44	.28	.74	
RB1163	1,000	18-14	.162	1/4"		.95	.44	.28	.74	
RB1103	1,000	18-14	.162	#6		.74	.28	.16	.60	
RB1124	1,000	18-14	.190	#8		.95	.31	.25	.79	
RB1154	1,000	18-14	.190	#10		.95	.31	.25	.79	
RC10-6F	50	12-10	.210	#6		.97	.31	.27	.81	.04
RC1113	500	12-10	.210	#6		.97	.31	.27	.81	
RC10-8F	50	12-10	.210	#8		1.00	.37	.27	.81	
RC1123	500	12-10	.210	#8		1.00	.37	.27	.81	
RC10-10F	50	12-10	.210	#10		1.00	.37	.27	.81	
RC1153	500	12-10	.210	#10		1.00	.37	.27	.81	
RC10-14F	50	12-10	.210	1/4"		1.12	.50	.27	.86	
RC1163	500	12-10	.210	1/4"		1.12	.50	.27	.86	
RC1124	1,000	12-10	.250	#8		1.10	.37	.27	.91	
RC1154	1,000	12-10	.250	#10		1.10	.37	.27	.91	

产品编号	包装件数	导线规格范围	最大值 (IN)	螺栓孔	推荐工具	尺寸				材料厚度
						A	B	C	M	
RA18-6FL	100	22-16	.136	#6		.86	.25	.25	.71	.02
RA2213	1,000	22-16	.136	#6		.86	.25	.25	.71	
RA18-8FL	100	22-16	.136	#8		.86	.29	.25	.71	
RA2243	1,000	22-16	.136	#8		.86	.29	.25	.71	
RA18-10FL	100	22-16	.136	#10		.86	.29	.25	.71	
RA2253	1,000	22-16	.136	#10		.86	.29	.25	.71	
RB14-6FL	100	18-14	.162	#6		.87	.25	.25	.71	.03
RB2213	1,000	18-14	.162	#6		.87	.25	.25	.71	
RB2214	1,000	18-14	.190	#6	ERG4001	.95	.25	.25	.79	
RB14-8FL	100	18-14	.162	#8		.87	.29	.25	.71	
RB2233	1,000	18-14	.162	#8		.87	.29	.25	.71	
RB14-10FL	100	18-14	.162	#10		.87	.29	.25	.71	
RB2253	1,000	18-14	.162	#10		.87	.29	.25	.71	
RB2254	1,000	18-14	.190	#10		.95	.29	.25	.71	
RC10-6FL	50	12-10	.210	#6		.97	.31	.27	.81	.04
RC2203	500	12-10	.210	#6		.97	.31	.27	.81	
RC2204	1,000	12-10	.250	#6		1.07	.31	.27	.91	
RC10-8FL	50	12-10	.210	#8		1.00	.37	.27	.81	
RC2213	500	12-10	.210	#8		1.00	.37	.27	.81	
RC10-10FL	50	12-10	.210	#10		1.00	.37	.27	.81	
RC2223	500	12-10	.210	#10		1.00	.37	.27	.81	
RC2224	1,000	12-10	.250	#10		1.10	.37	.27	.91	
RC10-14FL	50	12-10	.210	1/4"		1.12	.50	.32	.86	
RC2233	500	12-10	.210	1/4"		1.12	.50	.32	.86	


叉形端头

尼龙绝缘叉形端头 — 带法兰舌片



产品编号	包装件数	导线规格范围	最大值 (IN)	螺栓孔	推荐工具	尺寸				材料厚度
						A	B	C	M	
RA18-6FS	100	22-16	.136	#6	ERG4001	.75	.28	.16	.62	.02
RA1203	1,000	22-16	.136	#6		.75	.28	.16	.62	
RA18-8FS	100	22-16	.136	#8		.89	.31	.23	.65	
RA1223	1,000	22-16	.136	#8		.89	.31	.23	.65	
RA18-10FS	100	22-16	.136	#10		.93	.38	.26	.68	
RA1253	1,000	22-16	.136	#10		.93	.38	.26	.68	
RB14-6FS	100	18-14	.162	#6	ERG4001	.74	.28	.16	.60	.03
RB1203	1,000	18-14	.162	#6		.74	.28	.16	.60	
RB14-8FS	100	18-14	.162	#8		.89	.31	.23	.66	
RB1223	1,000	18-14	.162	#8		.89	.31	.23	.66	
RB14-10FS	100	18-14	.162	#10		.94	.38	.27	.69	
RB1253	1,000	18-14	.162	#10		.94	.38	.27	.69	
RB1204	1,000	18-14	.190	#6		.79	.28	.16	.67	
RB1224	1,000	18-14	.190	#8		.94	.31	.23	.71	
RC10-8FS	50	12-10	.210	#8		.97	.34	.23	.73	.04
RC1223	500	12-10	.210	#8		.97	.34	.23	.73	
RC10-10FS	50	12-10	.210	#10		1.00	.38	.26	.74	
RC1253	500	12-10	.210	#10		1.00	.38	.26	.74	
RC1224	1,000	12-10	.250	#8		1.08	.34	.23	.80	
RC1254	1,000	12-10	.250	#10		1.12	.38	.26	.86	

乙烯基绝缘叉形端头




产品编号	包装件数	导线规格范围	最大值 (IN)	螺栓孔	推荐工具	尺寸				材料厚度
						A	B	C	M	
18RA-6F	100	22-16	.150	#6	ERG4001	.94	.25	.27	.81	.02
RA1167	1,000	22-16	.150	#6		.94	.25	.27	.81	
18RA-8F	100	22-16	.150	#8		.97	.31	.27	.81	
RA1147	1,000	22-16	.150	#8		.97	.31	.27	.81	
18RA-10F	100	22-16	.150	#10		.97	.31	.27	.81	
RA1157	1,000	22-16	.150	#10		.97	.31	.27	.81	
14RB-6F	100	18-14	.170	#6	ERG4001	.97	.31	.27	.81	.03
RB647	1,000	18-14	.170	#6		.97	.31	.27	.81	
14RB-6FS	100	18-14	.170	#6		.89	.30	.25	.75	
14RB-8F	100	18-14	.170	#8		.97	.31	.27	.81	
RB657	1,000	18-14	.170	#8		.97	.31	.27	.81	
14RB-10F	100	18-14	.170	#10		.97	.31	.27	.81	
RB1157	1,000	18-14	.170	#10		.97	.31	.27	.81	
14RB-14F	100	18-14	.170	1/4"		1.11	.44	.38	.89	
RB1717	1,000	18-14	.170	1/4"		1.11	.44	.38	.89	
10RC-6F	50	12-10	.210	#6		1.09	.31	.27	.90	.04
RC1337	500	12-10	.210	#6		1.09	.31	.27	.90	
10RC-8F	50	12-10	.210	#8		1.09	.38	.27	.90	
RC1147	500	12-10	.210	#8		1.09	.38	.27	.90	
10RC-10F	50	12-10	.210	#10		1.09	.38	.27	.90	
RC1157	500	12-10	.210	#10		1.09	.38	.27	.90	
10RC-14F	50	12-10	.210	1/4"		1.15	.50	.37	.90	
RC1167	500	12-10	.210	1/4"		1.15	.50	.37	.90	

如需多种符合UL认证文件 E9609要求的电缆组合，参见第8页。

叉形端头


乙烯基绝缘叉形 — 扩展式绝缘



产品编号	包装件数	导线规格范围	最大值 (IN)	螺栓孔	推荐工具	尺寸				材料厚度
						A	B	C	M	
18RA-6FX	100	22-16	.170	#6	ERG4001	.94	.25	.27	.81	.02
RA1167-170	1,000	22-16	.170	#6		.94	.25	.27	.81	
18RA-8FX	100	22-16	.170	#8		.97	.31	.27	.81	
RA1147-170	1,000	22-16	.170	#8		.97	.31	.27	.81	
18RA-10FX	100	22-16	.170	#10		.97	.31	.27	.81	
RA1157-170	1,000	22-16	.170	#10		.97	.31	.27	.81	
14RB-6FX	100	18-14	.200	#6	ERG4001	.97	.31	.27	.81	.03
RB647-200	1,000	18-14	.200	#6		.97	.31	.27	.81	
14RB-8FX	100	18-14	.200	#8		.97	.31	.27	.81	
RB657-200	1,000	18-14	.200	#8		.97	.31	.27	.81	
14RB-10FX	100	18-14	.200	#10		.97	.31	.27	.81	
RB1157-200	1,000	18-14	.200	#10		.97	.31	.27	.81	
10RC-8FX	50	12-10	.250	#8		1.11	.38	.27	.90	.04
RC1147-250	500	12-10	.250	#8		1.11	.38	.27	.90	
10RC-10FX	50	12-10	.250	#10		1.11	.38	.27	.90	
RC1157-250	500	12-10	.250	#10		1.11	.38	.27	.90	
10RC-14FX	50	12-10	.250	1/4"		1.17	.50	.37	.90	

如需多种符合UL认证文件 E9609要求的电缆组合，参见第8页

乙烯基绝缘锁定叉形端头




产品编号	包装件数	导线规格范围	最大值 (IN)	螺栓孔	推荐工具	尺寸				材料厚度
						A	B	C	M	
18RA-6FL	100	22-16	.150	#6	ERG4001	.97	.25	.25	.81	.02
RA2217	1,000	22-16	.150	#6		.97	.25	.25	.81	
RA2227	1,000	22-16	.155	#6		.97	.29	—	.81	
18RA-8FL	100	22-16	.150	#8		.97	.29	.25	.81	
RA2247	1,000	22-16	.150	#8		.97	.29	.25	.81	
18RA-10FL	100	22-16	.150	#10		.97	.29	.25	.81	
RA2257	1,000	22-16	.150	#10		.97	.29	.25	.81	
14RB-6FL	100	18-14	.170	#6	ERG4001	.97	.25	.27	.81	.03
RB2207	1,000	18-14	.170	#6		.97	.25	.27	.81	
RB2217	1,000	18-14	.170	#6		.97	.29	.27	.81	
14RB-8FL	100	18-14	.170	#8		.97	.29	.27	.81	
RB2237	1,000	18-14	.170	#8		.97	.29	.27	.81	
14RB-10FL	100	18-14	.170	#10		.97	.29	.27	.81	
RB2257	1,000	18-14	.170	#10		.97	.29	.27	.81	
10RC-6FL	50	12-10	.220	#6		1.09	.31	.27	.90	.04
RC2207	500	12-10	.220	#6		1.09	.31	.27	.90	
10RC-8FL	50	12-10	.220	#8		1.09	.37	.27	.90	
RC2217	500	12-10	.220	#8		1.09	.37	.27	.90	
10RC-10FL	50	12-10	.220	#10		1.09	.37	.27	.90	
RC2227	500	12-10	.220	#10		1.09	.37	.27	.90	
10RC-14FL	50	12-10	.220	1/4"		1.09	.49	.27	.90	
RC2237	500	12-10	.220	1/4"		1.09	.49	.27	.90	

如需多种符合UL认证文件 E9609要求的电缆组合，参见第8页

叉形端头


乙烯基绝缘锁定叉形端头 — 扩展式绝缘



产品编号	包装件数	导线规格范围	最大值 (IN)	螺栓孔	推荐工具	尺寸				材料厚度
						A	B	C	M	
18RA-6FLX	100	22-16	.170	#6	ERG4001	.97	.25	.25	.81	.02
RA2217-170	1,000	22-16	.170	#6		.97	.25	.25	.81	
18RA-8FLX	100	22-16	.170	#8		.97	.29	.25	.81	
18RA-10FLX	100	22-16	.170	#10		.97	.29	.25	.81	
RA2257-170	1,000	22-16	.170	#10		.97	.29	.25	.81	
14RB-6FLX	100	18-14	.200	#6	ERG4001	.97	.31	.27	.81	.03
RB2207-200	1,000	18-14	.200	#6		.97	.31	.27	.81	
RB2217-200	1,000	18-14	.200	#6		.97	.29	.27	.81	
14RB-8FLX	100	18-14	.200	#8		.97	.31	.27	.81	
RB2237-200	1,000	18-14	.200	#8		.97	.31	.27	.81	
14RB-10FLX	100	18-14	.200	#10	ERG4001	.97	.31	.27	.81	.04
RB2257-200	1,000	18-14	.200	#10		.97	.31	.27	.81	
10RC-6FLX	50	12-10	.250	#6		1.07	.31	.27	.91	
RC2207-250	500	12-10	.250	#6		1.07	.31	.27	.91	
10RC-8FLX	50	12-10	.250	#8		1.10	.37	.27	.91	
10RC-10FLX	50	12-10	.250	#10	ERG4001	1.10	.37	.27	.91	
RC2227-250	500	12-10	.250	#10		1.10	.37	.27	.91	
10RC-14FLX	50	12-10	.250	1/4"		1.22	.50	.32	.96	

如需多种符合UL认证文件 E9609要求的电缆组合，参见第8页


非绝缘叉形端头



产品编号	包装件数	导线规格范围	螺栓孔	推荐工具	尺寸				材料厚度
					A	B	C	M	
A18-6F	100	22-16	#6	ERG4002	.72	.25	.27	.59	.02
A116	1,000	22-16	#6		.72	.25	.27	.59	
A18-8F	100	22-16	#8		.75	.31	.27	.59	
A114	1,000	22-16	#8		.75	.31	.27	.59	
A18-10F	100	22-16	#10		.75	.31	.27	.59	
A115-TB	1,000	22-16	#10	ERG4002	.75	.31	.27	.59	.03
B14-6F	100	18-14	#6		.75	.31	.27	.59	
B64	1,000	18-14	#6		.75	.31	.27	.59	
B19	1,000	18-14	#6		.66	.25	.13	.50	
B14-8F	100	18-14	#8		.75	.31	.27	.59	
B65-TB	1,000	18-14	#8	ERG4005	.75	.31	.27	.59	.04
B14-10F	100	18-14	#10		.75	.31	.27	.59	
B115	1,000	18-14	#10		.75	.31	.27	.59	
B14-14F	100	18-14	1/4"		.90	.44	.38	.68	
C10-6F	50	12-10	#6	ERG4005	.77	.31	.27	.63	.04
C133	500	12-10	#6		.77	.31	.27	.63	
C10-8F	50	12-10	#8		.82	.38	.27	.63	
C114	500	12-10	#8		.82	.38	.27	.63	
C10-10F	50	12-10	#10		.82	.38	.27	.63	
C115	500	12-10	#10	ERG4005	.82	.38	.27	.63	.04
C10-14F	50	12-10	1/4"		.98	.50	.37	.73	
C116-TB	500	12-10	1/4"		.98	.50	.37	.73	


叉形端头和针形端头

非绝缘锁定叉形端头



产品编号	包装件数	导线规格范围	螺栓孔	推荐工具	尺寸				材料厚度
					A	B	C	M	
A18-6FL	100	22-16	#6	ERG4002	.75	.25	.27	.59	.02
A221	1,000	22-16	#6		.75	.25	.27	.59	
A18-8FL	100	22-16	#8		.75	.29	.27	.59	
A224	1,000	22-16	#8		.75	.29	.27	.59	
A18-10FL	100	22-16	#10		.75	.29	.27	.59	
A225	1,000	22-16	#10		.75	.29	.27	.59	
B14-6FL	100	18-14	#6	ERG4002	.75	.25	.27	.59	.03
B220	1,000	18-14	#6		.75	.25	.27	.59	
B14-8FL	100	18-14	#8		.75	.29	.27	.59	
B223	1,000	18-14	#8		.75	.29	.27	.59	
B14-10FL	100	18-14	#10		.75	.29	.27	.59	
B225	1,000	18-14	#10		.75	.29	.27	.59	
C10-6FL	50	12-10	#6	ERG4005	.85	.31	.27	.66	.04
C220-TB	500	12-10	#6		.85	.31	.27	.66	
C10-8FL	50	12-10	#8		.85	.37	.27	.66	
C221	500	12-10	#8		.85	.37	.27	.66	
C10-10FL	50	12-10	#10		.85	.37	.27	.66	
C222	500	12-10	#10		.85	.37	.27	.66	
C10-14FL	50	12-10	1/4"		.85	.49	.27	.66	

针形端头

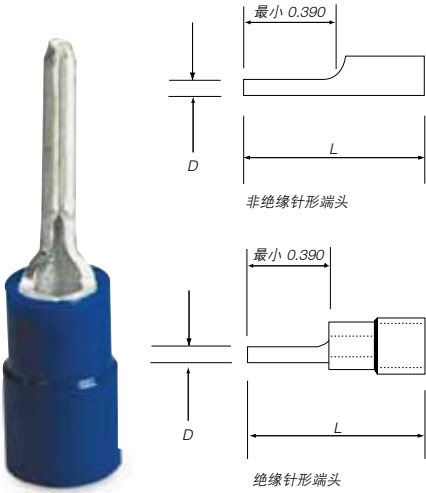

产品编号	包装件数	导线规格范围	D (直径)	L	推荐工具	材料厚度
非绝缘式						
A47PT	1,000	22-18	.075	.63	ERG4002	.02
B47PT	1,000	16-14	.075	.63		.03
C55PT	500	12-10	.106	.76		.04
乙烯基						
18RA-47PT	100	22-18	.075	.85	ERG4001	.02
RA47PT	1,000	22-18	.075	.85		
14RB-47PT	100	16-14	.075	.87		.03
RB47PT	1,000	16-14	.075	.87		
10RC-55PT	50	12-10	.106	1.04		.04
RC55PT	500	12-10	.106	1.04		
尼龙						
RA18-47PT	100	22-18	.075	.85	ERG4001	.02
RA147PT	1,000	22-18	.075	.85		
RB14-47PT	100	16-14	.075	.87		.03
RB147PT	1,000	16-14	.075	.87		
RC10-55PT	50	12-10	.106	1.04		.04
RC155PT	500	12-10	.106	1.04		



ABB_Thomas&Betts通贝电气连接件授权分销商
Sta-Kon接线端头

信德迈科技(北京)有限公司 CNMEC Technology Company
地址：北京朝阳区望京街10号望京SOHO-T1-C座2115室 邮编：100102
电话：010-8428 2935, 8428 9077, 8428 3983
Http：//www.cnmec.biz E-mail：sales@cnmec.biz
手机：139 1096 2635 传真：010-8428 8762