


Models: KTC-21 KTC-60 KTC-112

Features


- High pumping speed at pressures below 10 microns; much lower than attainable with single stage pumps
- Ultimate Vacuum: 0.2 microns (McLeod Gauge)
- Positive pressure lubrication assures operation at any pressure up to atmospheric pressure
- No metal-to-metal contact in pumping chamber
- Unequalled durability, even in dirty applications
- Triplex piston design for quiet, vibration-free operation

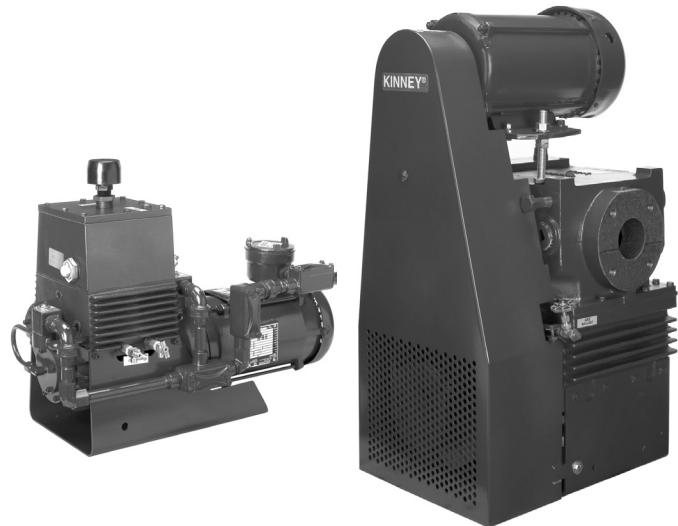

Specifications

	UNIT	MODEL		
		KTC-21	KTC-60	KTC-112
Nominal Displacement at Rated RPM	CFM / <i>m³/h</i>	21 / <i>36</i>	60 / <i>102</i>	107 / <i>182</i>
Motor	HP / <i>kW</i>	1.5 / <i>1.1</i>	3 / <i>2.2</i>	7.5 / <i>5.6</i>
Motor Speed	RPM	1725	960	1060
Cooling Water Required	GPM / <i>L/min</i>	—	—	1.5 / <i>5.7</i>
Oil Capacity	Quarts / <i>Liters</i>	2.0 / <i>1.9</i>	8.0 / <i>7.6</i>	16.0 / <i>15.1</i>
Pump Weight	Lbs. / <i>kg</i>	190 / <i>86</i>	515 / <i>234</i>	880 / <i>399</i>
Maximum Gas Ballast Flow	%	10	10	10
Gas Ballast Pressure	Torr (mm Hg abs.)	.020	.020	.020
Ultimate Pressure	Microns	.2	.2	.2
Noise Level at 0.1 Torr	dB(A)	72	70	70

Typical Pumping Speed

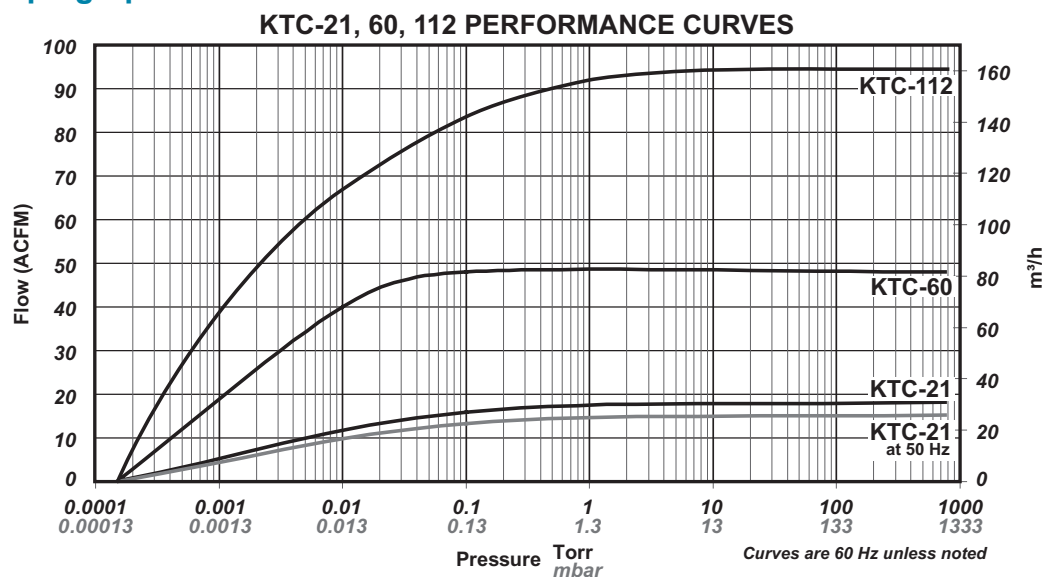


Dimensions:

Values shown are approximate and should not be used for construction.


Certified drawings are available through your local Tuthill Vacuum & Blower Systems Sales Professional.

Model KTC-21

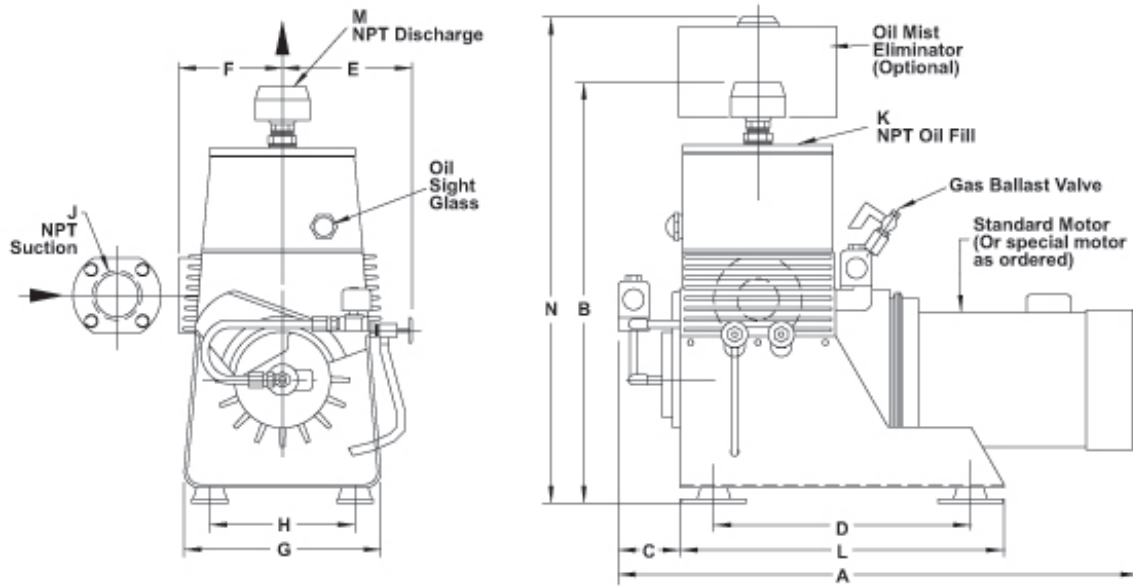

in. mm	A	B	C	D	E	F	G	H	J	K	L	M	N	Weight lbs / kg
KTC-21	25.13 638	20.25 515	3.00 76	12.38 314	6.25 159	5 127	9.5 241	7 175	2" NPT	¾" NPT	15.63 397	¾" NPT	23.44 595	190 86

Models KTC-60 and KTC-112

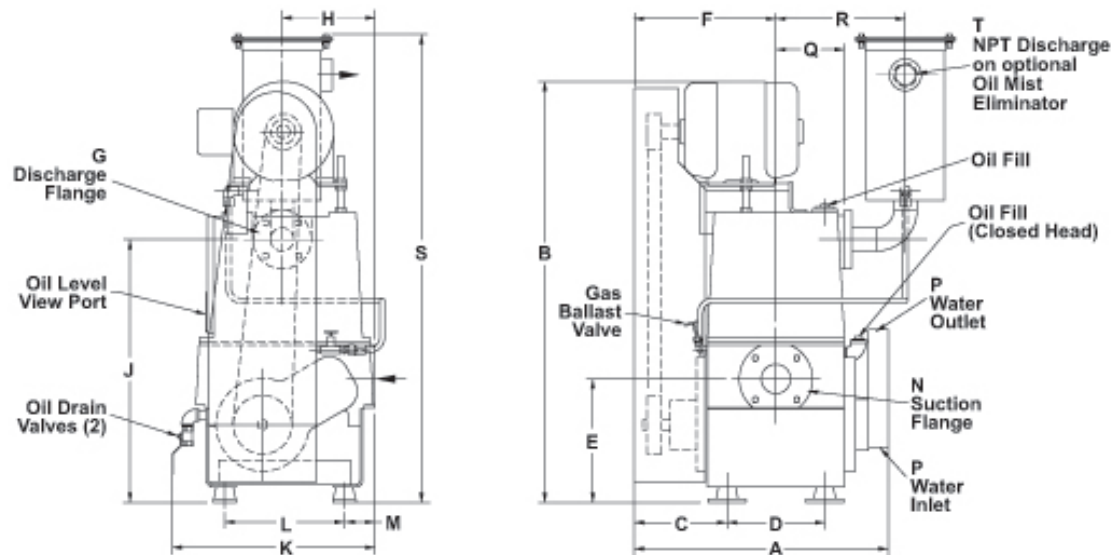

in. mm	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	Weight lbs / kg
KTC-60	23.69 602	36.50 927	8.19 208	10 254	19.63 498	13.19 335	1¼" FLG	8 203	21.44 545	19.7 500	11.50 292	2.25 57	3" FLG	—	6.19 157	11.50 292	38.44 976	1½" NPT	515 234
KTC-112	26 660	44.25 1124	9.5 241	10 254	14 356	14.50 368	2" FLG	9.50 241	28.25 718	20.75 527	12.25 311	3.13 79	3" FLG	¼" NPT	7.25 184	13.25 337	48.88 1242	2" NPT	880 399

Your Local Tuthill Vacuum & Blower Systems Sales Professional:

信德迈科技(北京)有限公司 CNMEC Technology Company

地址：北京朝阳区望京街10号望京SOHO-T1-C座2115室 邮编：100102

电话：010-8428 2935, 8428 9077, 8428 3983 手机：139 1096 2635

Http：//www.cnmec.biz E-mail：sales@cnmec.biz

传真：010-8428 8762



Tuthill Vacuum & Blower Systems

4840 West Kearney Street

Springfield, Missouri USA 65803-8702

o 417.865.8715 800.825.6937 f 417.865.2950

tuthillvacumblower.com

