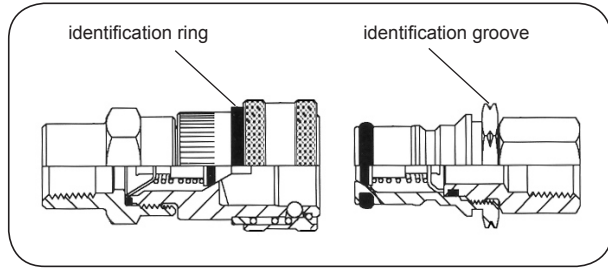



INDUSTRIAL FITTINGS - quick release couplings

HANSEN BEVERAGE PRODUCTS couplings for food industry





2HG / 2HL series


Working press.: 15 bar


Working temp.: Up to +130°C

Characteristics: All parts in contact with the medium are made of acid-resistant steel. The couplings are available in two versions: for gases and for fluids. These two versions are not interchangeable (different plug dimension), to avoid wrong connection. Easy to distinguish. Couplings for gases - white identification ring on a socket and a groove on the hexagon of a plug. Couplings for liquids - black identification ring on a coupling and a lack of groove on the hexagon of a plug.

	code	hose I.D. [inch]	medium	description
	HB-2HGRB	1/4	gases	90° socket with hose tail.
HB-2HLRB	1/4	liquids		


	code	hose I.D. [inch]	medium	description
	HB-2HGBNB	1/4	gases	Socket with hose tail.
	HB-2HGDNB	3/8		
	HB-2HLBNB	1/4	liquids	
HB-2HLDNB	3/8			


	code	thread size [inch]	medium	description
	HB-2HG720	7/16-20	gases	Socket with an UNF male thread (90° cone).
HB-2HL720	7/16-20	liquids		


	code	thread size [inch]	medium	description
	HB-2HGLLRA720	7/16-20	gases	90° socket with an UNF male thread (90° cone)..
HB-2HLLRA720	7/16-20	liquids		





















INDUSTRIAL FITTINGS - quick release couplings

HANSEN BEVERAGE PRODUCTS couplings for food industry

	code	thread size [inch]	medium	description
	HB-2HG15	1/4	gases	Socket with a NPT male thread.
	HB-2HG20	3/8		
	HB-2HL15	1/4	liquids	
HB-2HL20	3/8			


	code	thread size [inch]	medium	description
	HB-2HG16	1/4	gases	Socket with a NPT female thread.
HB-2HL16	1/4	liquids		

	code	medium	description
	HB-LN2HGA	gases	Socket without valve.
	HB-LN2HGB		Socket with a valve.
	HB-LN2HGC		Socket with a valve and seal.
	HB-LN2HLA	liquids	Socket without valve.
	HB-LN2HLB		Socket with a valve.
HB-LN2HLC	Socket with a valve and seal.		

2-HG and 2-HL socket components		
pic.	code	description
	HB-SE2HGLRB	90° connection with 1/4" hose tail
	HB-SE2HGLLRA720	90° connection with male thread 7/16"-20 UNF
	HB-SE2HGLBNB	1/4" hose tail + nut
	HB-SE2HGLDN	Nut for a fitting with hose tail
	HB-W2HGL1	Rubber seal
	HB-SE2HGLBNB1	1/4" hose tail
	HB-SE2HGLDNB1	3/8" hose tail
	HB-SE2HGL15	Connection with 1/4" NPT male thread x 11/16-18 UNF female thread
	HB-SE2HGL20	Connection with 3/8" NPT male thread x 11/16-18 UNF female thread
	HB-SE2HGL720	Connection with 7/16-20 UNF male thread x 11/16-18 UNF female thread
	HB-SE2HGL16	Connection with 1/4" NPT female thread x 11/16-18 UNF female thread
	HB-4BSVAB	Valve
	HB-2HG01A	Socket body for gases
	HB-2HL01A	Socket body for liquids
	HB-2HGL01B1	White identification ring (liquids)
	HB-2HGL01B2	Black identification ring (gases)
	HB-2104A302	Locking balls (3 pieces)
	HB-3S05	Ferrule spring
	HB-2HGL02	Ferrule
	HB-3S06	Retaining ring


INDUSTRIAL FITTINGS - quick release couplings

HANSEN BEVERAGE PRODUCTS couplings for food industry

	code	thread size [inch]	medium	description
	HB-2KGF	9/16-18 UNF	gases	Plug.
	HB-2KLF	5/8-18 UNF	liquids	

2-KG-F and 2-KL-F plug components		
pic.	code	description
①	HB-902-9-292	O-ring.
②	HB-2KG01F	Plug body 9/16-18 UNF female thread (gases)
③	HB-2KL01F	Plug body 5/8-18 UNF female thread (liquids)
④	HB-VA2KGLFA	Valve


	code	thread size [inch]	medium	description
	HB-2KGF16	1/4 NPT	gases	Plug with female thread.
	HB-2KGF720	7/16-20 UNF		
	HB-2KLF16	1/4 NPT	liquids	
HB-2KLF720	7/16-20 UNF			

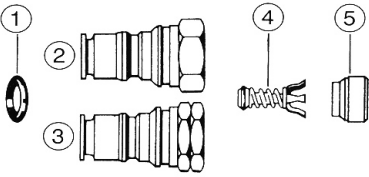
	code	thread size [inch]	medium	description
	HB-2KGF15	1/4 NPT	gases	Plug with male thread.
	HB-2KGF20	3/8 NPT		
	HB-2KLF15	1/4 NPT	liquids	
HB-2KLF20	3/8 NPT			


2-KG-F and 2-KL-F plug components		
pic.	code	description
①	HB-9029292	O-ring
②	HB-2KL01F	Plug body 5/8-18 UNF female thread (liquids)
③	HB-2KG01F	Plug body 9/16-18 UNF female thread (gases)
④	HB-VA2KGLFA	Valve
⑤	HB-9027292	O-ring
⑥	HB-PE2KGF1601	Connection with 1/4" NPT female thread (plug 2KG-F16, liquids)
	HB-PE2KLF1601	connection with 1/4" NPT female thread (plug 2KG-F16, gases)
	HB-PE2KGF72001	Connection with 7/16-20 UNF female thread (plug 2KG-F720, liquids)
	HB-PE2KLF72001	Connection with 7/16-20 UNF female thread (plug 2KG-F720, gases)
⑦	HB-PE2KGF1501	Connection with 1/4" NPT male thread (plug 2KG-F15, liquids)
	HB-PE2KLF1501	Connection with 1/4" NPT male thread (plug 2KG-F15, gases)
	HB-PE2KGF2001	Connection with 3/8" NPT male thread (plug 2KG-F20, liquids)
	HB-PE2KLF2001	Connection with 3/8" NPT male thread (plug 2KG-F20, gases)


INDUSTRIAL FITTINGS - quick release couplings

HANSEN BEVERAGE PRODUCTS couplings for food industry

	code	thread size [inch]	medium	description
	HB-2KGC	11/16-18 UNF	gases	Plug without connection part with plastic insert.
	HB-2KLC	3/4-18 UNF	liquids	

2-KG-C and 2-KL-C plug components		
pic.	code	description
	HB-902-9-292	O-ring.
	HB-2KL01C	Plug body with a fem. thread 3/4-18 UNF (liquids).
	HB-2KG01C	Plug body with a fem. thread 11/16-18 UNF (gases).
	HB-PVA372381	Valve.
	HB-NPI3723	Plastic insert.

	code	thread size [inch]	medium	description
	HB-2KGC RN	19/32-18 UNF	gases	Plug without connection part.
	HB-2KLC RN	19/32-18 UNF	liquids	

2-KG-CRN and 2-KL-CRN plug components		
pic.	code	description
	HB-902-9-292	O-ring.
	HB-2KG01CRN	Plug body with a fem. thread 19/32-18 UNF (gases).
	HB-2KL01CRN	Plug body with a fem. thread 19/32-18 UNF (liquids).
	HB-VA2KGLCRN	Valve.